



BLUEWAVE[®] QX4[™] RADIOMETER SYSTEM PRODUCT BULLETIN

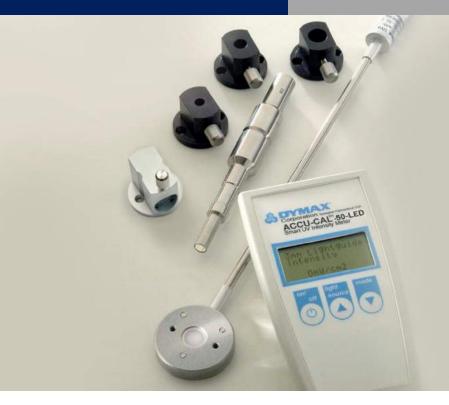

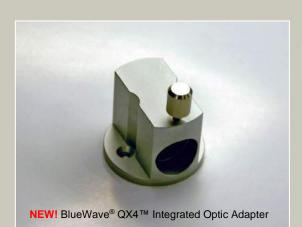

Radiometer System for the BlueWave[®] QX4[™]

Accurately Measure the Intensity of the BlueWave[®] QX4[™] Spot-Curing System with a New Integrated Optic Adapter

Dymax has developed improved hardware to more accurately measure intensity on the BlueWave[®] QX4[™] LED multi-head spot-curing system. This new radiometer system includes an Integrated Optic Adapter and internal operating software to improve the accuracy and consistency of intensity readings when used with the ACCU-CAL[™] 50-LED radiometer. The Integrated Optic Adapter is an integral part of the system, accommodating all three BlueWave[®] QX4[™] wand lens configurations (3, 5, and 8 mm). The adapter is calibrated specifically to the ACCU-CAL[™] 50-LED radiometer, allowing them to operate together and provide the accuracy demanded by today's manufacturing operations. Without the use of the correct adapter, measuring intensity is more sensitive to variation from axial position. The design of the Integrated Optic Adapter compensates for taking intensity readings at different axial positions and helps provide an additional level of consistency in intensity readings.

Available Systems

PN 42218 BlueWave[®] QX4[™] Adapter Upgrade Kit

For customers who already own an ACCU-CAL™ 50-LED radiometer

Includes:

- Integrated Optic Adapter
- Calibration of ACCU-CAL[™] 50-LED
- Updated Software

This kit includes the Integrated Optic Adapter as well as an upgrade of the internal software on the ACCU-CAL[™] 50-LED and calibration of both the Integrated Optic Adapter and radiometer. This kit requires you to return your ACCU-CAL[™] 50-LED radiometer to Dymax to upgrade the software and recalibrate the unit. Once the radiometer is upgraded, it will display the BlueWave[®] QX4[™] spot-curing mode in addition to the flood and lightguide diameter modes.

PN 40505 ACCU-CAL™ 50-LED Adapter Kit

For customers who don't own an ACCU-CAL™ 50-LED radiometer

Includes:

- ACCU-CAL™ 50-LED Radiometer
- 3, 5, & 8 mm Lightguide Adapters
- Integrated Optic Adapter
 Lightguide Simulator

Carrying Case

The BlueWave[®] QX4[™] Integrated Optic Adapter will now be part of the ACCU-CAL[™] 50-LED radiometer kit when purchased new. The radiometer will come preprogrammed with the necessary internal software to utilize the BlueWave[®] QX4[™] adapter in addition to the traditional 3, 5, & 8-mm lightguide adapters. OnU/cn2 Snm Lightguide Peak Intensity OnU/cn2 Jnm SPot Peak Intensity InU/cm2

lood Lanp

eak Intensity





© 2015 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation. Data sheets are available for valve controllers or pressure pots upon request. PB052 11/18/2015

Dymax Corporation 860.482.1010 | info@dymax.com | <u>www.dymax.com</u>

Dymax Europe GmbH +49 (0) 611.962.7900 | info_de@dymax.com | <u>www.dymax.de</u>

Dymax Engineering Adhesives Ireland Ltd. +49 (0) 611.962.7900 | info_ie@dymax.com | www.dymax.ie Dymax Oligomers & Coatings 860.626.7006 | oligomers&coatings@dymax.com | <u>www.dymax-oc.com</u>

Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd. +86.21.37285759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd. +86.755.83485759 | dymaxasia@dymax.com | www.dymax.com.cn Dymax Asia (H.K.) Limited +852.2460.7038 | dymaxasia@dymax.com | www.dymax.com

Dymax Asia Pacific Pte. Ltd. +65.6752.2887 | info_ap@dymax.com | www.dymax-ap.com

Dymax Korea LLC +82.2.784.3434 | info_kr@dymax.com | www.dymax.com/kr